HEIGHT-LED
海特奈德

UVLED固化系统及自动化设备
UVLED CURING SYSTEM & AUTOMATION SYSTEM



高新技术企业

专利申请
外观/实用/发明

ISO 9001
SGS

CE

RoHS

深圳市海特奈德光电科技有限公司
Shenzhen Height-LED Opto-electronics Technology Co.,LTD.

2023

企业简介
ENTERPRISE PROFILE



深圳市海特奈德光电科技有限公司（以下简称海特奈德）

海特奈德成立于2011年，是一家从事紫外光固化及自动化设备研发、制造、销售及服务为一体的国家高新技术企业。公司技术和研发实力雄厚，与多所知名大学及研究院合作，亦是国家高新项目的参与者。

海特奈德专注于UVLED光固化、点胶、自动化组装，深耕多个应用领域，包括3C、医疗、印刷、通信、半导体等行业，积累了丰富的紫外固化及相应配套应用专业技术经验，荣获大量产品专利证书，并通过ISO9001质量管理体系认证。

海特奈德秉承“高效、节能、环保”服务社会的新概念，坚持“以人为本，科技兴业，诚实守信”的经营理念，以质量求生存，以信誉求发展，以专业提供优质服务，赢得业界良好口碑，未来，我们将不断努力、创新，力争成为享誉全球的UVLED固化方案及自动化设备供应商！

Shenzhen Height-LED Opto-electronics Technology Co., LTD

Established in 2011, Height-LED is a National High-Tech Enterprise engaged in LED revolution for Industry Curing solutions and Automation Equipment. We have ODM , OEM and post-sale service to ensure customer satisfaction. Cooperates with many famous Universities and Research Institutes, Height-LED is a participant of National High-Tech projects.

Since the establishment of the company, Height-LED has pioneered the use of LEDs for UV industrial curing with a 100% focus on UV LED technology, manufacture UV LED units and solutions for demanding applications. With over 100 patents worldwide, Height-LED has earned the reputation for technological innovation, quality and reliability, we are also ISO 9001 certified !

In 2017, Automation Division was established, We start the research and development of dispensing curing and atomoatic assembly equipment, deeply cultivated multiple application fields, including 3C, medical, printing, communiction, semiconductor and other industries.

Our leadership team has over 15 years combined experience in high-technology Sales, Engineering, Manufacturing, and Marketing of semiconductors and systems.

企业文化
SPIRITAND CULTURE

企业信仰 Enterprise Belief

在拼搏中焕发新的活力！Striving

在团结中凝聚新的力量！Unity

在坚持中迈上新的目标！Persistence

经营理念 Business Philosophy

以人为本，科技兴业，诚实守信

People oriented / Science and Technology / Honesty and Faith

产品方针 Product Policy

高效、节能、环保

High efficiency, Energy saving, Environmental protection

人才战略 Talent Strategy

选择人才-我们有选择人才的权利，您同样拥有选择海特奈德的权利

培养人才-年龄、经验不再是制约您去做您喜好工作的因素，内在的素质、内在的潜能更重要

发展人才-发掘个人的潜能，让工作的场所成为您发挥才能的舞台

成就人才- 忠诚于节能环保事业及为全人类的可持续发展贡献全部力量是我们公司全体人员应有的品质

Respect: We company and talents choose each other.

Cultivation: Age and experience are no longer constraints, inner quality and potential are more important.

Development: Our company is a stage for you to discover and give full play to your talents.

Talents Achieve: We are committed to energy saving and environmental protection,

and contribute all our strength to the sustainable development of all mankind.



目录
CONTENTS

I 企业发展历程 HISTORY P02

II 产品介绍 PRODUCT INTRODUCTION

自动化系统 AUTOMATION SYSTEM

- 自动化UVLED固化设备 UVLED AUTOMATED SYSTEM P03
- 细胞工厂组装设备 CELL CULTURE DISH ASSEMBLY SYSTEM P04
- 在线式视觉点胶UVLED固化设备 CCD DISPENSING AND CURING SYSTEM P05
- 双面点胶固化设备 TWO-SIDED DISPENSING AND CURING SYSTEM P06
- 多轴点胶固化设备 MULTI-AXIS DISPENSING AND CURING SYSTEM P07
- 压合固化设备 PRESS AND UVLED CURING MACHINE P08
- 更多自动化设备 MORE INTRODUCTION P09

UVLED固化系统 UVLED CURING SYSTEM

- UVLED印刷/涂布固化系统 PRINTING/COATING UVLED CURING SYSTEM P10
- UVLED烤箱 UVLED CURING OVEN P11
- UVLED固化机 UVLED CURING MACHINE P12
- UVLED固化光源 UVLED CURING SYSTEM P13

其他系统 OTHERS

- 紫外线消毒设备 ULTRAVIOLET STERILIZATION EQUIPMENT P14

III 专注品质 追求卓越 FOCUS ON QUALITY AND PURSUE EXCELLENCE P15

IV 资质证书与合作伙伴 QUALIFICATION CERTIFICATES & PARTNERS P16

发展历程 HISTORY

2023 荣获专精特新证书
SRDI

公司乘势而上，目前已获专精特新证书
Awarded the SRDI

2022 国际质量体系认证
INTERNATIONAL QUALITY CERTIFIED

2022年荣获ISO9001国际质量管理体系认证证书
AWARDED ISO9001

2021 市场推广部成立
MARKETING DEPARTMENT ESTABLISHED

市场推广部成立,全面转型升级智能制造自动化
Upgrade intelligent automated manufacturing

2020 杀菌设备研发成功
DEVELOP UV STERILIZATION TECHNOLOGY

疫情之下，成功推出紫外线杀菌灯，杀菌炉等产品
Successful launch of UV sterilization lamp/oven

2019 荣获国高证书
NATIONAL HIGH-TECH ENTERPRISE CERTIFIED

获国家高新技术企业证书，同时点胶、喷胶固化一体机相关自动化设备成功推广
Enter the dispensing & curing automation market

2018 获CE及相关专利证书等
CE AND PATENT CERTIFICATE VERTIFIED

全面申请并通过多项专利证书
Fully applied for and passed several patent certificates

2017 自动化事业部成立
AUTOMATION DEPAR TMENT ESTABLISHED

自动化事业部成立，自此在自动化研发方面突飞猛进
Rapid progress in automation R&D

2016 柔印、胶印取得突破
TECHNOLOGY IN PRINTING BREAKTHROUGH

全面打开UVLED柔印、胶印市场
Significant breakthroughs in flexo and offset printing markets

2015 进军印刷市场
ENTER THE PRINT MARKET

海特奈德全面发展UVLED印刷市场
UVLED丝印有了重点突破
Full development of UVLED printing market

2014 明确目标
COMPANY ORIENTATION

公司目标：立志做全球信赖的UVLED固化方案提供商
Company Vision: To be the world's trusted UVLED curing solution provider

2013 成立外贸部
OVERSEAS DEPARTMENT ESTABLISHED

公司外贸部成立，产品出口到欧美东南亚，澳洲，非洲等世界各地
Exported to Europe, America, Southeast Asia, Australia, Africa, all over the world

2012 多款设备自主研发成功
MULTI DEVICES IRD SUCCEED

公司成功自主研发多款设备，并筹备申请相关专利
Multi Devices IRD Succeed, and Patent apply

2011 公司成立
COMPANY ESTABLISHED

深圳市海特奈德光电有限公司成立
Establish Shenzhen Height-LED Technology Company Limited

EIGHT-LED

Part II SECOND

自动化UVLED固化设备
UVLED AUTOMATED SYSTEM



设备功能 Function

自动扫码上传MES系统+UVLED固化+自动检测UV能量+自动上下料+治具回流

Auto-scan/upload to MES System+UVLED curing+Auto-detect UV energy+Self-feeding + Fixture reflux

设备特点 Features

- 全自动化，工业4. 0对接
  Fully automated, industrial 4.0 docking
- 防产品漏UV固化
  Prevent product from missing UV curing
- 电流检测，能量检测
  Current / energy detection

技术参数 Parameters

型号	Model	HTZD-II-SB500200-NH-2
整机外形尺寸	Dimension	L7700mm * W2467mm * H2490mm
分拣装置尺寸	Dimension of sorting device	L3312mm * W2500mm * H2110mm
整机功耗	Power consumption	≤44KW
输入电压	Input voltage	三相AC380V 50HZ (3P AC380V 50HZ)
控制方式	Control method	PLC+人机界面控制 (PLC+HMI)
模组定位精度	Module positioning accuracy	0.02mm
传送带速度	Conveyor speed	0.5-10m/min
传送带宽度	Belt width	620mm

行业应用 Application

显示屏OCA工艺（车载，电视机，平板等），各类PCB/PCBA的三防及焊点补强等

Display OCA process (in-car, TV, tablet, etc.), Various PCB/PCBA's Conformal coating and solder joint reinforcement, etc.



车载屏 In Car Screen　电脑屏 PC Screen　平板屏 Tablet screen　PCB板 PCB　PCBA PCBA

EIGHT-LED

Part II SECOND

细胞工厂组装设备
CELL CULTURE DISH ASSEMBLY SYSTEM



设备功能 Function

自动上料+点胶+组装+UVLED压合固化+自动下料
Automatic loading + dispensing + assembling + UV LED laminating and curing + automatic unloading

设备特点 Features

- UV胶密封替代传统超声波焊接工艺，气密性更好、良率更高，生产过程无碎屑产生，自带除静电功能
  UV adhesive instead of traditional ultrasonic weld -ing process,better air tightness, Higher product yield, no debris in the production process, anti-static
- 1-40层可自定义调整层数
  1-40 layers adjustable
- 运行稳定，快速切换不同规格产品、UV光源寿命长
  High performance, stable operation, quickly switch between different specifications, and long lifespan of UVLED

技术参数 Parameters

型号	Model	HTZD-YLXB-ND201
外形尺寸	Dimension	5300 * 1200 * 2500mm（L* W * H）
整机功耗	Power consumption	≤8.5KW
输入电压	Input voltage	AC220V 50Hz
控制方式	Control method	PLC+人机界面(PLC+HMI)
取料轴精度	Accuracy of reclaiming shaft	0.05mm
点胶轴精度	Accuracy of dispensing axis	0.01mm
重复定位精度	Accuracy of Repeat positioning	0.01mm
生产层数	Number of production layers	1-40层可调(1-40 layers adjustable)


行业应用 Application



细胞培养皿 Cell culture dishes



细胞培养瓶 Cell culture flasks

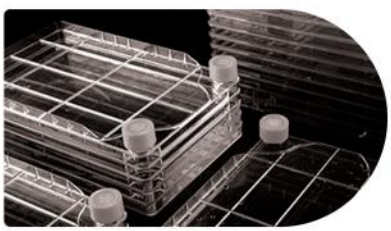

细胞培养工厂 Cell culture plant

EIGHT-LED

Part II

在线式视觉点胶UVLED固化设备
CCD DISPENSING AND CURING SYSTEM



设备功能 Function

在线式视觉定位点胶+UVLED固化+对接上下位机

CCD dispensing + UVLED curing + docking up and down machine

设备特点 Features

- 视觉定位，智能识别点胶
  Visual positioning, intelligent dispensing
- 点胶固化一体，增值、高效
  Dispensing&curing integrated, value-added, efficient
- 支持标准SMEMA通讯
  Support standard SMEMA communication

技术参数 Parameters

型号	Model	HTZD-DGZX-BD01
外形尺寸	Dimension	1530 * 1350 * 1900mm（L* W * H）
整机功耗	Power consumption	≤3000W
输入电压	Input voltage	AC220V 50Hz
控制方式	Control method	视觉点胶系统 (Visual Dispensing Control System)
运行速度	Running speed	0-500mm/s
轨道宽度	Track width	100-450 mm
行程	Itinerary	X450mm,Y240mm, Z150mm
位置精度	Accuracy of Position	0.01mm

行业应用 Application

各类PCB/PCBA的三防漆及焊点补强、柔性线路板等应用

Various PCB/ PCBA' s Conformal coating and solder joint reinforcemen,flexible circuit boards, etc.



软排线 Soft Cable　PCB板 PCB　PCB板 PCB　PCBA PCBA　PCBA PCBA

双面点胶固化设备
TWO-SIDED DISPENSING AND CURING SYSTEM



设备功能 Function

点胶+自动翻转+UVLED固化
Dispensing + Auto-flip + UVLED curing

设备特点 Features

- 点胶固化一体
  Dispensing and curing Integration
- 自动翻转，双面点胶
  Auto-flip, two-sided dispensing
- 无红外辐射，冷光源，适用于各类热敏感材料的固化
  No IR radiation, cold light source, perfect for curing various materials, even the heat-sensitive material

技术参数 Parameters

型号	Model	HTZD-DGZM-B361
主机外形尺寸	Dimension	L600mm * W550mm * H657mm
光源尺寸	LED lamp dimension	354mm * 119mm * 100mm
整机功耗	Power consumption	≤370W
输入电压	Input voltage	AC220V 50Hz
光功率范围	Optical power range	1-100%
点胶轨迹	Dispensing track	点线面 (point, line, area)
翻转角度	Flip angle	0°/180°
行程	Itinerary	X260mm,Y380mm,Z120mm

行业应用 Application

光通讯、光纤、各类数据线材、PCBA焊点补强、3C类电子产品等
Optical communication, optical fiber, all kinds of data cables, PCBA solder joint reinforcement, 3C type electronic products, etc.



光通讯 Optical Communication | 光纤 Fiber optic | 数据线材 Data cable | PCBA PCBA | 3C 3C

EIGHT-LED

Part II

多轴点胶固化机
MULTI-AXIS DISPENSING AND CURING SYSTEM



设备功能 Function

多角度点胶+UVLED固化
Multi-angle dispensing + UVLED curing

设备特点 Features

- 3D非平面轨迹路径点胶
  3D non-planar path dispensing
- 治具支持360°旋转功能及多角度点胶
  The fixtures support 360°rotation and multi -angles dispensing
- 点胶固化一体
  Dispensing and curing integration

技术参数 Parameters

型号	Model	HTZD-DJGH-N401
主机外形尺寸	Dimension	L670mm * W660mm * H810mm
整机功耗	Power consumption	≤800W
输入电压	Input voltage	AC220V 50Hz
XYZ最高速度	X/Y/Z-Axis max speed	300mm/s
重复精度	Repeat accuracy	0.02mm
点胶阀类型	Dispensing valve	喷胶阀（Glue spraying valve）
净重	Net weight	50KG

行业应用 Application

3C类电子产品、医疗耗材、光通讯等行业应用
3C /Medical Consumables/Optical Communication, etc.




摄像头模组 Camera | 电声 Electroacoustic | 医疗耗材 Medical Consumables | 3C 3C | 光通讯 Optical Communication

EIGHT-LED

Part II

UVLED压合固化机
PRESS AND UVLED CURING MACHINE

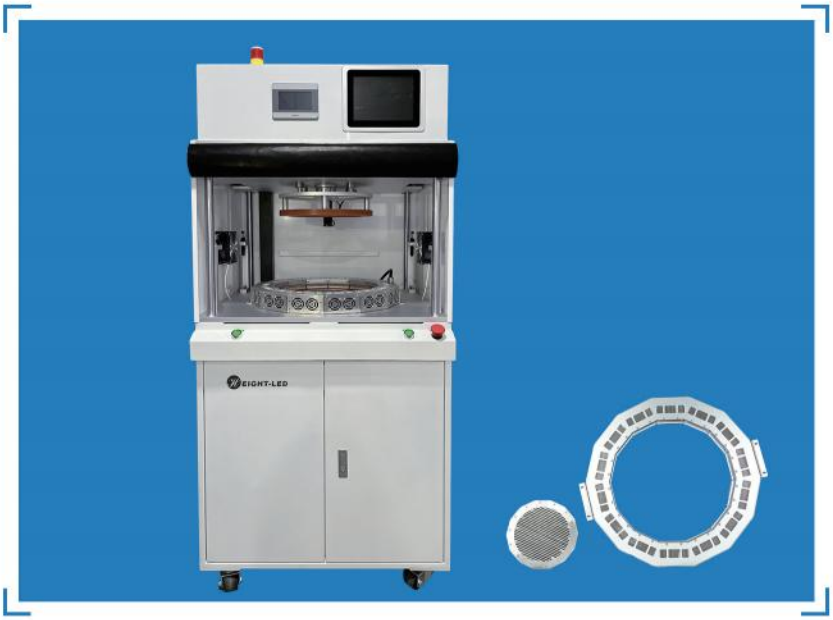

设备功能 Function

保压+UVLED固化
Press-fi + UVLED curing

设备特点 Features

- 压合固化同步运行，有效保证产品气密性
  Pressing and curing run synchronously to effectively ensure the air tightness of the product.
- 精密伺服电机,智能调节保压压力
  Precision servo motor, intelligent adjustment of pressure retention.
- 多组UVLED光源，实现产品360° 均匀照射
  Multiple groups of UVLED light sources to achieve 360° uniform illumination of the product

技术参数 Parameters

型号	Model	HTZD-SXGH-N03
主机外形尺寸	Dimension	754mm*700mm*1830mm
光源尺寸	Lamp Dimension	（外Outside）Φ523mm （内Inside）φ210mm
整机功耗	Power consumption	≤3000W
输入电压	Input voltage	AC220V (50HZ)
设备气压	Equipment air pressure	0.5-0.7mpa
压合位置精度	Compression position accuracy	±0.001 mm
净重	Net weight	190KG

行业应用 Application

液体分离杯、拖地机水箱、引流箱、扫地机机器人水箱、呼吸机水箱、加湿器水箱等行业应用
3C /Medical Consumables/Optical Communication, etc.

其他行业
Others



液体分离杯
Liquid separation cup



呼吸机水箱
Ventilator water tank



引流箱
Drainage box






扫地机水箱
Sweeper water tank

其他行业
Others

UVLED印刷/涂布固化系统
PRINTING/COATING UVLED CURING SYSTEM

产品介绍 Introduction

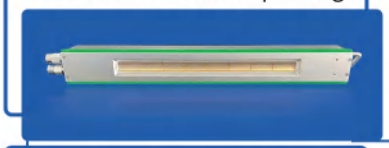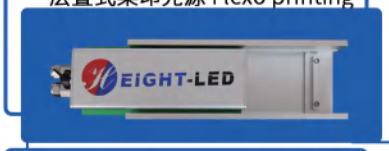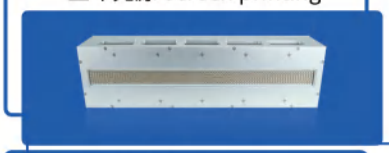产品图片 Product	型号 Model	固化宽幅 Curing width(mm)	波长 Wavelength(nm)	光功率密度 Optic power	散热方式 Cooling method
机组式柔印光源 Flexo printing 	HTJP-II-SN35025-BL-CN HTJP-II-SN35025-BH-CN	260/350/420 /470/530	385/395nm	26W/cm² 40W/cm²	水冷 Water cooling
层叠式柔印光源 Flexo printing 	HTJP-II-SN35030-BL-N	350/420 /470/530	385/395nm	16W/cm²	水冷 Water cooling
间歇式柔印光源 Flexo printing 	HTJP-II-SN35030-BH-N	350/420 /470/530	385/395nm	16W/cm²	水冷 Water cooling
丝印光源 Screen printing 	XYUV-4II-SN30025-BH-N	150/200/300 /350/600	385/395nm	10W/cm² 16W/cm²	风冷 Fan cooling 水冷 Water cooling
胶印光源 Offset printing 	HTJP-II-SE105040-BH-N	520/660/750/940 /1020/1050/1080	385/395nm	20W/cm²	水冷 Water cooling
涂布光源 Coating 	HTJP-II-SS160030-BH-N	600/1100 /1300/1600	365nm	10W/cm²	水冷 Water cooling

更多波长，固化宽幅及功率均可定制 More wavelengths, curing widths and power can be customized.

行业应用 Application



更多自动化设备
MORE INTRODUCTION

产品介绍 Introduction




1

名　称	Product	自动上、下料视觉点胶设备 AUTOMATIC LOAD/UPLOAD VISION DISPENSING MACHINE
型　号	Model	HTZD-DGLS-N401
外型尺寸	Dimension	L1500 * W1100 * H2270mm
功能及应用	Functions	自动上、下料视觉点胶/应用于集菌杯等 Automatic loading and unloading+vision dispensing Fungus collection cup and related products



2

名　称	Product	双工位视觉点胶机 DUAL PLATFORM VISION DISPENSING MACHINE
型　号	Model	HTZD-DJZM-N401-2
外型尺寸	Dimension	L1350 * W1040 * H1800mm
功能及应用	Functions	双平台独立控制/应用于拖地机水箱等 Dual platform and independent control . For Water tank of mop



3

名　称	Product	点胶固化机 DISPENSING AND CURING MACHINE
型　号	Model	HTZD-DJGH-N301
外型尺寸	Dimension	L660*W680*H800mm
功能及应用	Functions	点胶+UVLED固化一体/应用于各种点胶+UV固化类产品 Dispensing+ UVLED curing integration . For various dispensing and UV curing products



4

名　称	Product	喷涂固化机 SPRAY CURING MACHINE
型　号	Model	HTZD-PGZM-N301
外型尺寸	Dimension	L815mm*W630mm*H748mm
功能及应用	Functions	喷胶+UVLED固化/应用于3C电子、FPC、PCB、PCBA等产品 Spraying + UVLED curing/applied to 3C electronics, FPC、PCB, PCBA and other products



5

名　称	Product	UVLED输尿管支架注胶固化机 URETERAL STENT GLUE INJECTION AND CURING EQUIPMENT
型　号	Model	HTZD-YLZJ-N401
外型尺寸	Dimension	L1303 * W780 * H1687mm
功能及应用	Functions	注胶+UVLED固化/应用于医疗输尿管 Glue injection + UVLED curing . For medical ureteral stent

更多波长，尺寸及功率均可定制 More wavelengths, sizes and power can be customized.

UVLED固化机
UVLED CURING MACHINE

产品介绍 Introduction

UVLED固化机 UVLED CURING MACHINE

设备特点：多种模式可选、光源灯珠异常检测、数字调光、光源高温报警、数字调速、生产计数、安全防呆等
Features: Multi work modes, LEDs anomaly detection,digital dimming and speed regulation, high temp alarm, production count, safety protect etc.



型　　号	HTCD-II-FS200200-BH
出光面积	200x200mm
波　　长	365/385/395/405nm
光功率密度	0.8-1.2W/cm²
散热方式	风冷/水冷(Fan /Water cooling)



型　　号	HTCS-II-FS300200-BH	HTCS-II-FS400200-BH	HTCS-II-FS500200-BH
出光面积	300x200mm	400x200mm	500x200mm
波　　长	365/385/395/405nm	365/385/395/405nm	365/385/395/405nm
光功率密度	0.8-2W/cm²	0.8-2W/cm²	0.8-2W/cm²
散热方式	风冷/水冷(Fan/water cooling)	风冷/水冷(Fan/water cooling)	风冷/水冷(Fan/water cooling)




型　　号	HTCC-II-FS300300-BH	HTCC-II-FN500100-BH-2
出光面积	350x50mm	500x100mm
波　　长	365/385/395/405nm	365/385/395/405nm
光功率密度	1.2W/cm²	1.2W/cm²
散热方式	风冷/水冷(Fan /Water cooling)	风冷/水冷(Fan /Water cooling)



型　　号	HTCC-II-FS250200-NL-2
出光面积	250x200mm
波　　长	365/385/395/405nm
光功率密度	0.6-2W/cm²
散热方式	风冷/水冷(Fan /Water cooling)

行业应用 Application

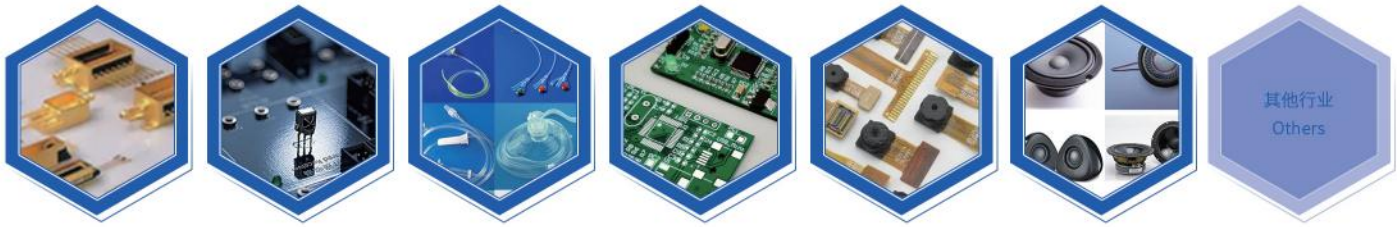

光通讯 Optical Communication
微电子 Microelectronics
医疗耗材 Medical Consumables
PCB/PCBA PCB/PCBA
摄像头 Camera
电声 Electroacoustic

UVLED烤箱
UVLED CURING OVEN


产品介绍 Introduction

1.UVLED烤箱 UVLED CURING OVEN

设备特点：智能安全门保护、生产计数统计、光源高温报警、数字调光、具有配方数据和数据存储功能等
Features: Safety protect, production count, high temp alarm, digital dimming, data storage etc.



型　　号	HTBX-II-FS200200-BL	HTBX-II-FS300200-BL	HTBX-II-FS500400-BL
外形尺寸	L450*W380*H355 (mm)	L635*W520*H520 (mm)	L810*W620*H590 (mm)
内腔尺寸	L230*W220*H130 (mm)	L330*W240*H160 (mm)	L530*W440*H200 (mm)
波　　长	365/385/395/405nm	365/385/395/405nm	365/385/395/405nm
光功率密度	0.5-0.8W/cm²	0.5-0.8W/cm²	0.5-0.8W/cm²
散热方式	风冷/水冷(Fan/water cooling)	风冷/水冷(Fan/water cooling)	风冷/水冷(Fan/water cooling)

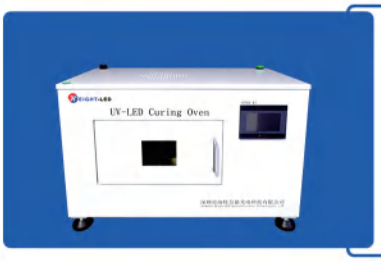

型　　号	HTBX-II-FS200200-BL-2	HTBX-II-FS250250-BL-4
外形尺寸	L450mm*W425mm*H375mm	L708*W470*H518 (mm)
内腔尺寸	L230mm*W220mm*H200mm	L340xW300xH175 (mm)
波　　长	365/385/395/405nm	365/385/395/405nm
光功率密度	0.5-0.8W/cm²	0.5-0.8W/cm²
散热方式	风冷/水冷(Fan/water cooling)	风冷/水冷(Fan/water cooling)



型　　号	HTBX-II-FN200200-BD	HTBX-II-FN250250-BD-2
外形尺寸	L450mm*W385mm*H415mm	L635mm*W517mm*H718mm
内腔尺寸	L230mm*W220mm*H200mm	L300mm*W300mm*H350mm
波　　长	395/405nm	395/405nm
光功率密度	0.8W/cm²	0.8W/cm²
散热方式	风冷(Fan cooling)	风冷(Fan cooling)

2.UVLED解胶机 UVLED DEGUMMING MACHINE

设备特点：智能安全门保护、氮气与非氮气模式可选、内腔气压实时监测及过压保护、自动补气、光源高温报警、数字调光、配方数据及数据存储等特点
Features: Safty protect, Nitrogen/non-nitrogen, over pressure - over temp protection, automatic replenishment, data storage etc.



型　　号	HTBX-II-FS200200-BJ	HTBX-II-FS300300-BJ
外形尺寸	L524*W396*H448 (mm)	L615*W486*H518 (mm)
内腔尺寸	L250*W250*H100 (mm)	L350*W350*H100 (mm)
波　　长	365/385/395/405nm	365/385/395/405nm
光功率密度	0.5-0.8W/cm²	0.5-0.8W/cm²
散热方式	风冷/水冷(Fan/water cooling)	风冷/水冷(Fan/water cooling)

更多波长，尺寸及功率均可定制 More wavelengths, curing sizes and power can be customized.

行业应用 Application



光通讯 Optical Communication　晶圆 Wafers　医疗耗材 Medical Consumables　3D printing 3D printing　摄像头 Camera　电声 Electroacoustic

UVLED固化光源
UVLED CURING SYSTEM

产品介绍 Introduction

1. UVLED点光源 UVLED SPOT CURING SYSTEM




型号 Model	光斑直径 Diameter (mm)	波长 Wavelength(nm)	光功率密度 Optic power	散热方式 Cooling method
HTLD-4II	3/4/6/8/10/12/15/20mm	365/385/395/405	1-20W/cm²	风冷/自冷 Fan/ Air cooling

2. UVLED线光源 UVLED LINEAR CURING SYSTEM




型号 Model	出光面积 Emitting area (mm)	波长 Wavelength(nm)	光功率密度 Optic power	散热方式 Cooling method
SZUV-II	110/165/220x10mm 330/440/550x10mm	365/385/395/405	2-4W/cm²	风冷/水冷 Fan/Water cooling

3. UVLED面光源 UVLED AREA CURING SYSTEM

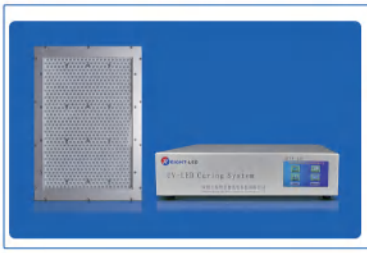

型号 Model	出光面积 Emitting area (mm)	波长 Wavelength(nm)	光功率密度 Optic power	散热方式 Cooling method
SZUV-II	50/100/200/300/400x50mm 100/200x100mm	365/385/395/405	0.6-2W/cm²	风冷/水冷 Fan/Water cooling
XYUV-4II	300/400x100mm 100/150x150mm 200/250/300/400/500x200mm 300/400x300mm 500x400mm			

4. UVLED平行曝光光源 UVLED PARALLEL EXPOSURE CURING SYSTEM

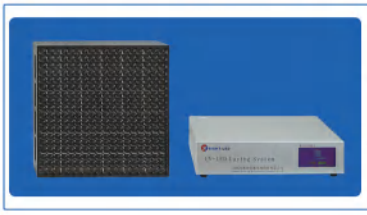

型号 Model	出光面积 Emitting area (mm)	波长 Wavelength(nm)	光功率密度 Optic power	散热方式 Cooling method
SZUV-II	120×120mm 230×230mm	365/385/395/405	50-200mW/cm²	风冷/水冷 Fan/Water cooling
XYUV-4II	346×346mm			

更多波长，尺寸及功率均可定制 More wavelengths, curing sizes and power can be customized.

行业应用 Application



光通讯 Optical Communication
激光半导体 Semiconductors
摄像头 Camera
医疗耗材 Medical Consumables
触摸屏 Touch Screen
数据线材 Data cable
电声 Electroacoustic


紫外线消毒炉
UV STERILIZATION OVEN

产品介绍 Introduction

广泛应用在医院，食品厂、化妆品厂、奶品厂、酿酒厂、饮料厂、面包房和冷藏室等
Widely used in hospital, food factories, cosmetics factories, dairy factories, breweries, beverage factories, bakeries and cold rooms.









设备特点 Features

1.光照均匀	1. Uniform illumination
2.快速杀菌	2. Rapid and effective sterilization
3.低噪音，节能省电	3. Low noise, energy saving
4.多档调节	4. Multi-level adjustment
5.不锈钢抗菌材质	5. Stainless steel antibacterial material

技术参数 Parameters

型　号	Model	HTCS-II
设备全长	Dimension	2000mm
进出料口宽度	Conveyor width	400mm
设备功耗	Input voltage	≤350W

更多波长，尺寸及功率均可定制 More wavelengths, curing sizes and power can be customized.

行业应用 Application



茶叶 Tea　医疗口罩 Masks　食物 Food　化妆品 Cosmetics　水果饮料 Fruit drinks　酿酒 Beverage

专注品质 追求卓越
FOCUS ON QUALITY AND PURSUE EXCELLENCE


精益生产 Just in time



试验 Experiment



检测 Testing

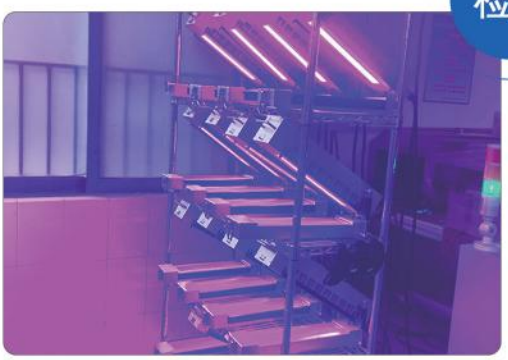

专 业 | 智 能 | 精 益

PROFESSIONAL INTELLIGENT L E A N

资质证书与合作伙伴
QUALIFICATION CERTIFICATES & PARTNERS

资质证书 QUALIFICATION CERTIFICATES



合作伙伴 PARTNERS

AVERY DENNISON · BYD · TPK 宸鸿科技集团 Touching Tomorrow, Today · 大族激光 HAN'S LASER · FOXCONN
HUAWEI · 华星光电 CSOT · HUAQIN 华勤通讯 · KYOCERA · BOE
LUXSHARE-ICT 立讯精密 · mindray 迈瑞 · .film · Apple · AVIENT Formerly PolyOne
SAMSUNG · 3M · 舜宇光学科技 SUNNY OPTICAL TECHNOLOGY · TUOREN 驼人医疗器械 · MicroPort 微创医疗
SIEMENS · ASM · Enpower 英搏尔 · silver star 银星智能 · 中国科学院 CHINESE ACADEMY OF SCIENCES

以上为部分合作伙伴，排名不分先后顺序
THE ABOVE ARE SOME PARTNERS, REGARDLESS OF ORDER

以人为本 | 科技兴业 | 诚实守信

PEOPLE ORIENTED | SCIENCE AND TECHNOLOGY | HONESTY AND FAITH

HEIGHT-LED 海特奈德 | 深圳市海特奈德光电科技有限公司

Shenzhen Height-LED Opto-electronics Technology Co.,LTD

Tel : +86 755-27381112 / +86 189 2658 6856

E-mail : info@height-led.com

Web : http : //www.height-led.com

https : //www.heightled.com

地址：深圳市龙华区大浪街道同胜社区赖屋山新村三和国际2号楼2层

Add : 2/F, Tower B, Sanhe International Science&Technology Building,DaLang Rd, Shen Zhen City, Guangdong Province, China.